

SV301
INSTRUCTION MANUAL

Before operating the unit, please read this manual thoroughly,
and retain it for future reference.

本产品由无线摄像头CM200和无线影音接收机RC302组成，采用微型CMOS图像传感器和微型无线影音发射、接收技术，产品体积小巧，图像声音效果好，无线发射距离远，功耗低，适用于家庭老人、婴儿监护，商场监控，电子玩具等应用。

注意事项:

请按说明正确连接各部件，请勿拆卸改装本产品，否者会造成产品损坏或超出相关法律法规条款。

一. 产品功能指示:


1. 接收机(RC302)



2. 无线摄像头 (CM200)




3. AV线

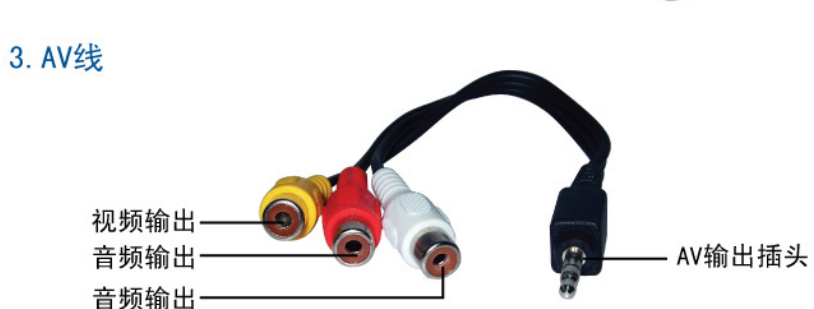


二. 频道选择操作：

注意：摄像头工作频道和接收机工作频道要一致才能正常使用，如果图像有干扰，请切换至另外的工作频道。

1、摄像头工作频道选择图示：



2、接收机工作频道选择图示



二. 产品使用图例：



四. 产品技术规格

PRODUCT MODEL	SPECIFICATIONS	
CM200 WIRELESS CAMERA	Transmission Frequency	ISM 2.4GHz 8CH
	Transmission Power	10mW / CE;2mW / FCC
	Imaging Sensor Type	CMOS (PAL) NTSC)
	CMOS Total Pixels	0.3 MPixel
	Horizontal Resolution	380 TV Lines
	View Angle	55°
	Minimum Illumination	3Lux/F1.2
	Power Supply	DC 3.7-5.5V 200mA
	Dimensions (WxDxH)	23×31×23mm(Main Body)
	Weight	20g
RC302 WIRELESS RECEIVER	Receiving Sensitivity	≤-90dBm
	Receiving Frequency	ISM 2.4GHz 8CH
	Antenna Port	50ohm SMA
	Antenna	Gain: 2dBi
	Power Supply	DC 5V 110mA
	Vided Output level	1Vp-p@75Ω
	Audio Output level	1Vp-p@10KΩ
	Dimensions (WxDxH)	100×70×18mm
	Weight	100g
POWER ADAPTER	INPUT: AC 100 -240V 50-60Hz; OUTPUT: DC 5V 500mA	
OPERATING TEMPERATURE	-10℃~ +50℃ / +14℉~ +122℉	
STORAGE TEMPERATURE	-20℃ ~ +60℃ / -4℉ ~ +140℉	
OPERATING HUMIDITY	85%RH	